

DESCRIPTION:

Manual alarm call points are designed for the purpose of raising an alarm manually once verification of a fire or emergency condition exists, by operating the push button.

FEATURES:

- Sends manual alarm signal to control panel via 2-wire bus.
- High reliability and wide range application.
- Adopt programmer to input address code rather than using code switch.
- Push down glass type rather than Break glass type to avoid frequently changing classes.
- Super-thin structure design.
- Key Protected manual fire initiation Device.
- One red LED indication.
- Fully confirms IS: 2189



ELECTRICAL SPECIFICATIONS:

Operating Voltage Range	18 to 26VDC
Rated Voltage	19V DC
Quiescent current	approx. 350 μ A @ 19V
Emergency operation Alarm	Approx. 1.5 mA
Operating indicator	LED, red (Blinking)
Alarm indication	LED, red (still)

ENVIRONMENTAL SPECIFICATIONS:


Ambient Temperature	-20°C to + 70°C
Storage Temperature	-30°C to + 75°C
Humidity	max 95% Relative Humidity

MECHANICAL INFORMATION:

Dimension	87x87x53 mm
Weight	Approx. 200g
Color	Red
Material	ABS Plastic


ARCHITECT/ENGINEER SPECIFICATIONS

Addressable Manual Call Point (DE-MCP-9i)

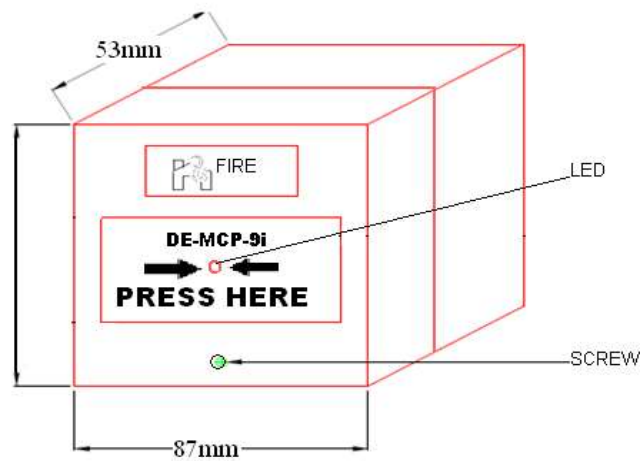

WIRING DIAGRAMS:

Addressable Manual Call Point (DE-MCP-9i)

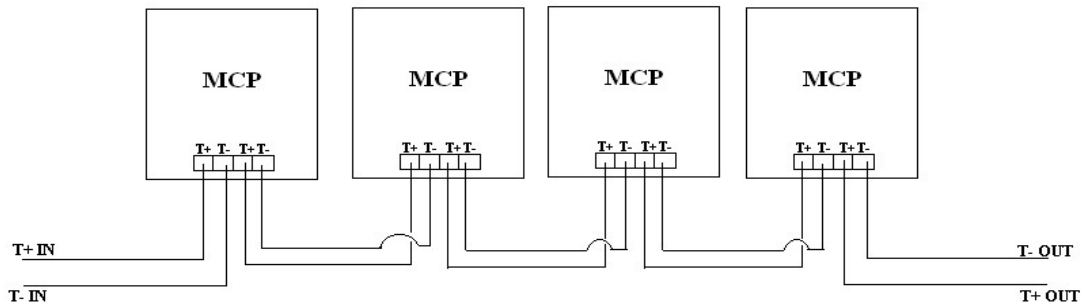

No.

Function

T -	(LOOP IN/ LOOP OUT)
T +	(LOOP IN/ LOOP OUT)



DAKSH ELECTRONICS (P) LTD.
One Source Complete Solution



**AN ISO:9001:2015
CERTIFIED COMPANY
EN 54-7**

H.O.:19, DSIDC, Computer Complex, Scheme-1, Okhla
Industrial Area, Phase-2, New Delhi-110020 (India)

Tel: +91-11-26385033, 26385390, 46515680

Email: ase99india@yahoo.co.in

Web: www.dakshglobal.com

Works: B-220, ELDECO, Sidcul Industrial Park, Phase-1,

Sitarganj, U.S. Nagar, Uttarakhand-262405 (India)

Tel: +91-11-26385033, 26385390, 46515680

Mob: +91-9811937979

Email: h_kundu@dakshglobal.com,

Web: www.dakshglobal.com

Note: It is essential to ensure that only known compatible components are used in a fire detection system. If in doubt, always consult the fire control panel supplier/manufacturer.