

Description

The manual call point will be suitable for two-wire system. It will have the facility to test check the working of the call point without breaking the glass. The MCP will have a plastic sheet. This Device shall be activated when Press the glass which is attached to it. Due to this the fire alarm control panel will generate a fire alarm signal.

Features

- Red LED indication
- Safe & reliable
- Complimentary range of accessories
- Flush or surface mounting
- Available with or without internal resistor
- Front Protection Glass Cover
- fully confirms IS: 2189



Electrical Specifications:

Operating Voltage	DC 18V to 24V
Rated Voltage	24V DC
Standby current	0mA
Emergency operation Alarm	Approx. 20mA
LED indication	Present

Environmental Specifications:


Temperature	-10°C to +70°C
Operating Humidity	max.95% RH(Relative Humidity)

Mechanical Information:

Dimensions	87x87x53mm
Weight	Approx150g
Colour	Red
Housing	Abs Plastic


Architect/Engineer Specifications

Conventional Manual Call Point

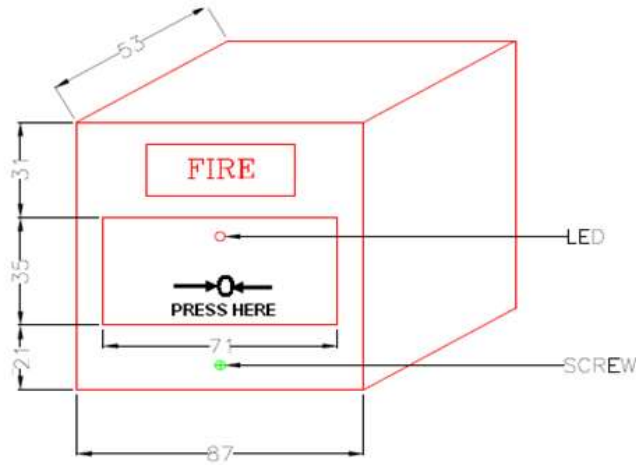

Wiring Diagrams

Conventional Manual Call Point

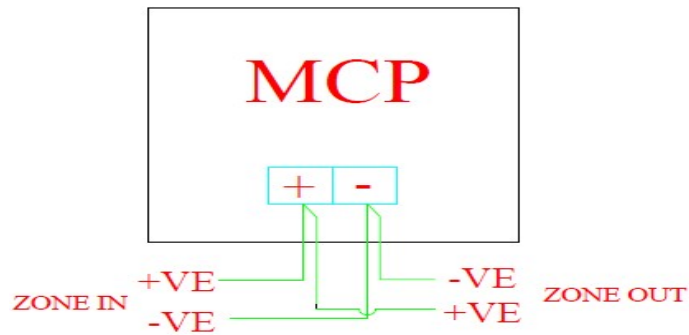

No.	Function
+	Zone In/Out (+)
-	Zone In/Out (-)



AN ISO:9001:2015
CERTIFIED COMPANY
EN 54-7

H.O.:19, DSIDC, Computer Complex, Scheme-1, Okhla Industrial Area, Phase-2, New Delhi-110020 (India)

Tel: +91-11-26385033, 26385390, 46515680

Email: ase99india@yahoo.co.in

Web: www.dakshglobal.com

Works: B-220, ELDECO, Sidcul Industrial Park, Phase-1,

Sitarganj, U.S. Nagar, Uttarakhand-262405 (India)

Tel: +91-11-26385033, 26385390, 46515680

Mob: +91-9811937979

Email: h_kundu@dakshglobal.com,

Web: www.dakshglobal.com

Note: It is essential to ensure that only known compatible components are used in a fire detection system. If in doubt, always consult the fire control panel supplier/manufacturer.