

DESCRIPTION:

The Electronic sounder is designed for use within fire alarm systems, security systems and industrial signaling systems. Combined sounder and beacon provides an audio-visual warning which is suitable for place which requires high sound output and visual indication.

FEATURES:

- 24 Volt DC operation
- High Sound output
- Flash indication.
- ABS Plastic Body
- Wall mounted type
- Attractive look
- Suitable for Mall, Bank, Restaurant etc
- Suitable for sound polluted areas
- Low power consumption
- fully confirms IS: 2189



ELECTRICAL SPECIFICATIONS:

Operating Voltage	24V DC
Standby current	0mA
Emergency operation Alarm	Approx. 100mA
Flashing Indication	White High intensity light
Sound output	85db @ 1 meter
Audio element	Speaker

ENVIRONMENTAL SPECIFICATIONS:


Temperature	-10°C to +70°C
Operating Humidity	max.95% RH(Relative Humidity)

MECHANICAL INFORMATION:


Dimensions	153x153x78mm
Weight	Approx450g
Colour	Red
Housing	ABS Sheet

ARCHITECT/ENGINEER SPECIFICATIONS:

Hooter cum Flasher (Mini)

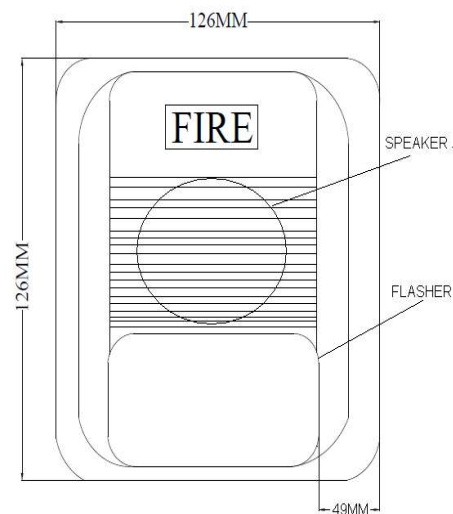

WIRING DIAGRAMS:

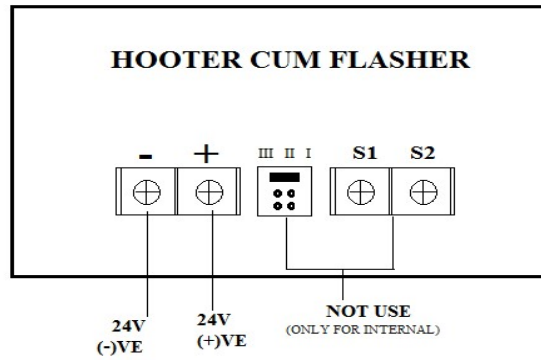

No.	Function
+	24V (+)
-	24V (-)



**AN ISO:9001:2015
CERTIFIED COMPANY
EN 54-7**

H.O.:19, DSIDC, Computer Complex, Scheme-1, Okhla Industrial Area, Phase-2, New Delhi-110020 (India)

Tel: +91-11-26385033, 26385390, 46515680

Email: ase99india@yahoo.co.in

Web: www.dakshglobal.com

Works: B-220, ELDECO, Sidcul Industrial Park, Phase-1,

Sitarganj, U.S. Nagar, Uttarakhand-262405 (India)

Tel: +91-11-26385033, 26385390, 46515680

Mob: +91-9811937979

Email: h_kundu@dakshglobal.com,

Web: www.dakshglobal.com

Note: It is essential to ensure that only known compatible components are used in a fire detection system. If in doubt, always consult the fire control panel supplier/manufacture.