

Description

The hooter shall be solid state type speaker having continuous dual tone audible alarm for evacuation. The hooter shall be suitable for an audible range of 80dB at 1M with a frequency range of 500Hz to 1000Hz

The Electronic hooter is designed for use with in fire alarm systems, security systems and industrial signaling systems. It provides an audio warning which is suitable for place which needs audio indication.

Features

- Low power consumption
- High Performance
- 100 Volt AC operation
- Inbuilt Line matching transformers (LMT) for PA System
- fully confirms IS: 2189
- Easy Installation

Electrical Specifications:

Operating Voltage	AC 70V to 100V
Standby current	0mA
Emergency operation Alarm	Approx. 250mA
Sound output	85db @ 1 meter
Speaker Wattage	4 Watt
Speaker impedance	8 ohms

Environmental Specifications:

Temperature	-10°C to +70°C
Operating Humidity	max.95% RH (Relative Humidity)


Mechanical Information:

Dimensions	185x130x78mm
Weight	Approx 1000g
Colour	Red
Housing	CRC Sheet




Architect/Engineer Specifications

Conventional Hooter (Hooter-MS)

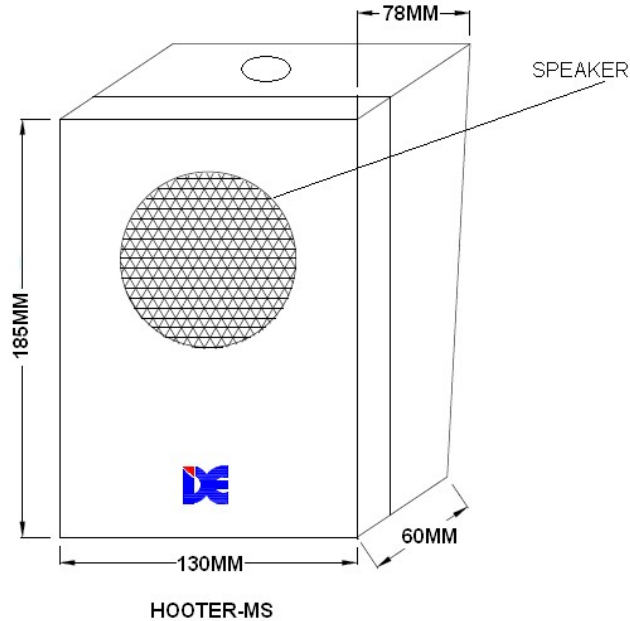

Wiring Diagrams

Conventional Hooter (Hooter-MS)

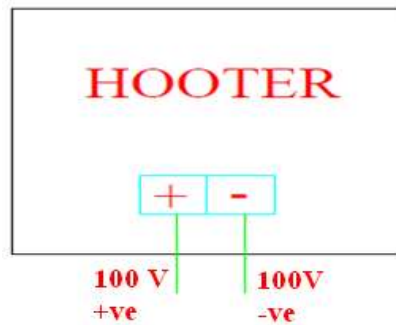

No.	Function
+	100V AC (+)
-	100V AC (-)



AN ISO:9001:2015
CERTIFIED COMPANY
EN 54-7

H.O.:19, DSIDC, Computer Complex, Scheme-1, Okhla
Industrial Area, Phase-2, New Delhi-110020 (India)

Tel: +91-11-26385033, 26385390, 46515680

Email: ase99india@yahoo.co.in

Web: www.dakshglobal.com

Works: B-220, ELDECO, Sidcul Industrial Park, Phase-1,
Sitarganj, U.S. Nagar, Uttarakhand-262405 (India)

Tel: +91-11-26385033, 26385390, 46515680

Mob: +91-9811937979

Email: h_kundu@dakshglobal.com,

Web: www.dakshglobal.com

Note: It is essential to ensure that only known compatible components are used in a fire detection system. If in doubt, always consult the fire control panel supplier/manufacture.