

## Description

---

This Device shall be activated at the time of fire through Fire Alarm System and is capable of producing the sound output of 85 db. After the activation of this device the flasher card which is enclosed in same unit will flash a high intensity white light to indicate the fire signal. Flashers not only warn those who might not be able to hear a conventional sounder, such as the hearing impaired, they can also light the way to safety as they are commonly located near exits.

## Features

---

- 24 Volt DC operation
- High Sound output
- MS CRCA Body
- Wall mounted type
- High Performance
- Flash indication.
- Easy Installation
- fully confirms IS: 2189



## Electrical Specifications:

---

Operating Voltage	DC 18V to 24V
Rated Voltage	24V DC
Standby current	0mA
Emergency operation Alarm	Approx. 250mA
Flashing Indication	White High intensity light
Sound output	85db @ 1 meter
Audio element	Speaker

## Environmental Specifications:

---

Temperature	-10°C to +70°C
Operating Humidity	max.95% RH(Relative Humidity)


## Mechanical Information:

---

Dimensions	220x130x78mm
Weight	Approx 1400g
Colour	Red
Housing	CRC Sheet

## Architect/Engineer Specifications


Conventional Hooter cum Flasher (DE-HCF-MS)

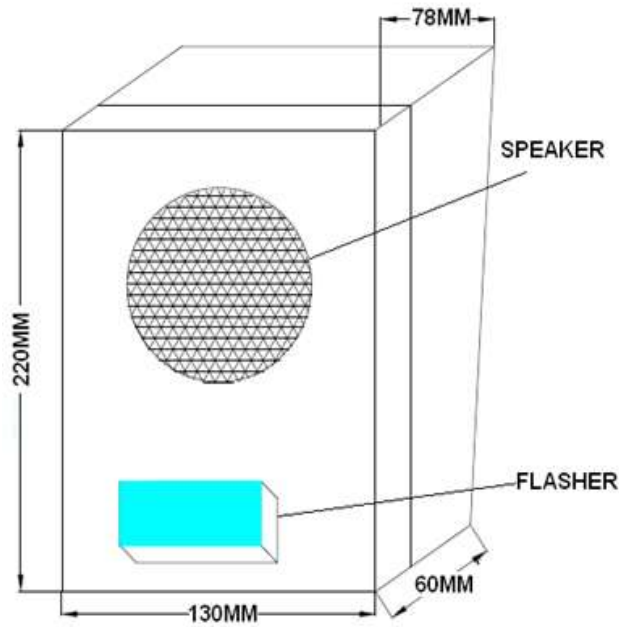

HOOTER CUM FLASHER-MS

## Wiring Diagrams

Conventional Hooter cum Flasher (DE-HCF-MS)

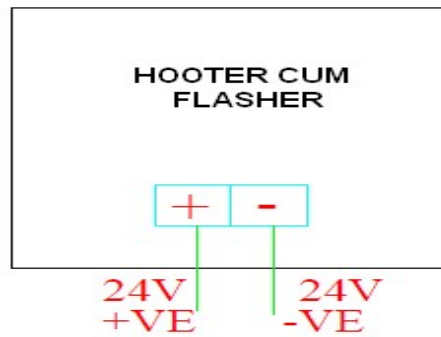

No.	Function
-----	----------

+	24V (+)
-	24V (-)



**AN ISO:9001:2015  
CERTIFIED COMPANY  
EN 54-7**

H.O.:19, DSIDC, Computer Complex, Scheme-1, Okhla  
Industrial Area, Phase-2, New Delhi-110020 (India)

Tel: +91-11-26385033, 26385390, 46515680

Email: [ase99india@yahoo.co.in](mailto:ase99india@yahoo.co.in)

Web: [www.dakshglobal.com](http://www.dakshglobal.com)

**Works:** B-220, ELDECO, Sidcul Industrial Park, Phase-1,  
Sitargnj, U.S. Nagar, Uttarakhand-262405 (India)

Tel: +91-11-26385033, 26385390, 46515680

Mob: +91-9811937979

Email: [h\\_kundu@dakshglobal.com](mailto:h_kundu@dakshglobal.com),

Web: [www.dakshglobal.com](http://www.dakshglobal.com)

**Note:**It is essential to ensure that only known compatible components are used in a fire detection system. If in doubt, always consult the fire control panel supplier/manufacturer.